

Yellow Jacket

Mild Steel Floor Scales




• WAREHOUSING • GENERAL INDUSTRIAL • SHIPPING & RECEIVING • FILLING • RENTAL • PALLET



VISIT OUR WORLD TODAY
WWW.FAIRBANKS.COM

Yellow Jacket

Mild Steel Floor Scales

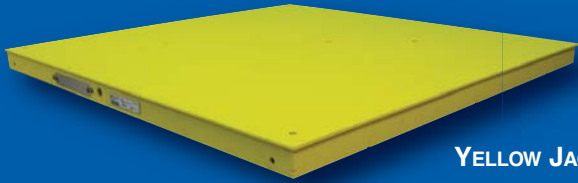**YELLOW JACKET
WITH SMOOTH DECK**



**YELLOW JACKET WITH
SAFETY TREAD DECK AND
OPTIONAL SAFETY TREAD RAMP**

The Yellow Jacket Floor Scale is finished with a safety yellow powder coat paint that is easy for forklift operators to see, even in low-light warehouse environments. The scale is constructed of durable Type A36 carbon steel and has a unique multi-ribbed understructure support design, made to provide years of uninterrupted and accurate performance.

GREAT CHOICE FOR A VARIETY OF APPLICATIONS


The Yellow Jacket is available in a 4' x 4' design, with either 2,500 pound or 5,000 pound capacity. Fairbanks engineers created this revolutionary scale for optimum weight analysis. Its design meets or exceeds most application requirements. A competitive offering in a competitive market — the Yellow Jacket Floor Scale.

FEATURES

- Two capacities: 2,500 lbs. and 5,000 lbs.
- 4' x 4' platforms with 3" profile.
- 1/4" thick deck plate with lifting eyebolts.
- Safety tread or smooth deck.
- NTEP and FM approved load cells.
- NTEP approved platform.
- Unique multi-ribbed understructure support.
- Durable, non-slip powder coat paint (safety yellow).
- Top access leveling with built-in bubble level.

SPECIFICATIONS

Platform	0.25" thick deck (smooth or safety tread)
Platform Height	3"
Platform Sizes/Capacities	4' x 4' — 2.5 k 4' x 4' — 5 k
Overload Capacity	150% of rated scale capacity
Cable Length	30' (platform to instrument)
Construction	Mild steel: Type A36 carbon steel
Paint	Safety yellow powder coat paint
Grade Level	In operation, scale must be firmly supported at all four corners and within 3° of level
Accessories	Ramps, bumper guards, lifting eyebolts, bolt down plates, quick disconnects, stand-alone pillar, factory calibration
Approval	NTEP CC# 10-008
Load cell	
Construction	Mild steel
Resistance	350 Ω \pm 2 Ω
Approvals	NTEP CC# 06-079, Factory Mutual

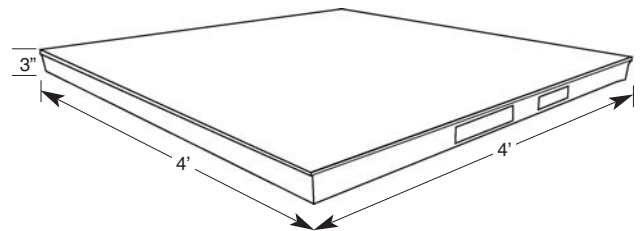

Call toll-free for the representative nearest you:

(800) 451-4107

Call between 8:00 a.m. – 5:00 p.m. Central Time

Corporate Offices: 821 Locust • Kansas City, MO 64106 • (816) 471-0231

www.Fairbanks.com

Models and specifications subject to change without notice. © Fairbanks Scales Inc.



St. Johnsbury manufacturing facility registered in compliance with ISO 9001:2000.

