

Now Includes:  
5 Year Parts & Lightning  
Protection Warranty

## SURVIVOR® OTR

Flattop - Concrete Deck



### STANDARD FEATURES

- Top access to load cells and junction box
- 75,000lb capacity load cells and G-Force™ mount assemblies
- Junction box(es) appropriate for number of load cells utilized
- NTEP Certified, CC 02-003A2
- 100,000lb Concentrated Load Capacity (CLC)
- 100,000lb Dual Tandem Axle (DTA)
- Up to 270,000lb full scale capacity
- Span deflection ratio (1:1300) for legal highway loads
- 6in thick concrete deck
- Three standard widths: 10ft, 11ft, and 12ft (available up to 14ft, NTEP Certified)


**Package includes:** Assembled weighbridge modules and weighbridge fasteners; load cells with conduit fitting; load cell mounts with leveling bolts and anchor bolts; copper transient bypass cables at each load cell; conduit for load cell cable runs; poly-coated flexible steel conduit from load cell to metal conduit; conduit fittings from poly-coated flexible steel to metal conduit; FRP junction box(es); homerun cable to indicator (60ft long); print packages including foundation drawing (pier, floating slab or pit) and installation manual; galvanized pan for concrete.

**Package does not include:** Approach coping; foundation alignment posts; rebar and mesh for foundation; concrete; indicator; printer; freight charges including material handling; shipping charges, transportation permits and fees, escort(s) charge, and insurance transportation fees.

### APPROVALS



**SURVIVOR**  
Durable performance  
measured not in years, but  
decades.

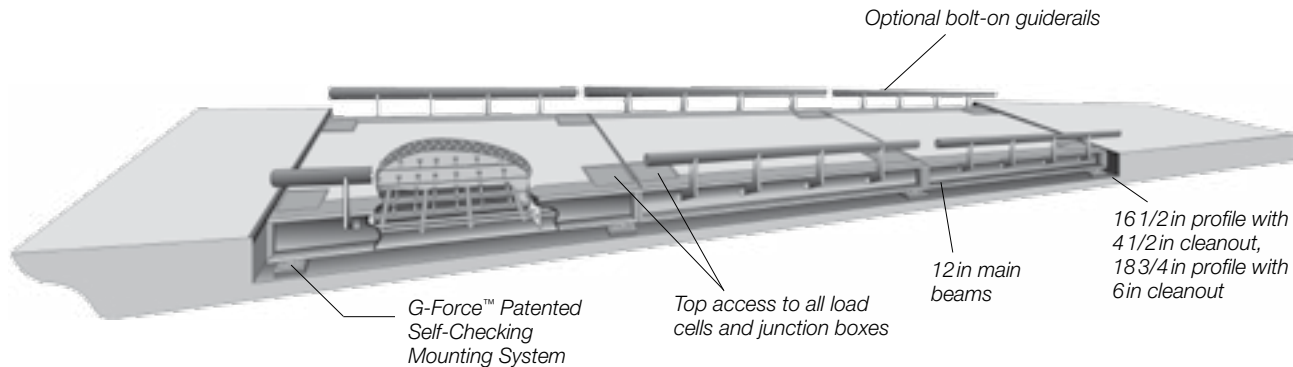

### SPECIFICATIONS

#### LOAD CELLS AND MOUNT ASSEMBLIES:

75,000lb capacity; G-Force™ Patented Self-Checking Mounting System, top access to load cells

#### FULL SCALE CAPACITY:

Up to 270,000lb

#### DEFLECTION RATIO:

1:1300

#### CONCENTRATED LOAD CAPACITY (CLC):

100,000lb

#### DUAL TANDEM AXLE (DTA):

100,000lb

#### APPROVALS:

NTEP Certified per H-44, Class III, CC 02-003A2

#### WARRANTY:

Five-year limited warranty on the weighbridge  
Five-year parts warranty, including lightning protection  
Please refer to Warranty Statements starting on page 53

**DUE TO THE VARIETY OF CONFIGURATIONS, PLEASE CONSULT THE FACTORY TO DISCUSS APPLICATION REQUIREMENTS AND FOR COMPLETE SPECIFICATIONS AND PRICE QUOTATIONS.**